



### Features:

- Simple operation
- Robust accelerometer & cable
- Colour display
- Stores over 900 measurements
- Large measurement range
- Rechargeable battery
- Easily view, export & report data
- Supplied as a kit with everything you need to begin measuring

### Applications:

- Hand Arm Vibration Exposure Measurements
- Risk assessment
- Power tool condition and maintenance database
- ISO 5349 : 2001 Mechanical Vibration Guidelines for Measurement
- ANSI S2.70 (2006) guide for the measurement and evaluation of human exposure to vibration transmitted to the hand

Make all the measurements necessary for Hand Arm Vibration risk assessment. The HAVex Tri-Axial Hand Arm Vibration Meter has been specifically designed for Hand Arm Vibration Exposure Measurements.



OIL & GAS



CONFINED SPACE



HYGIENE



MINING



LABORATORIES



HVAC



DEFENCE



SHIPPING



FUMIGATION

### Control Equipment Pty Ltd ABN 23 009 838 582

#### QLD:

Unit 1 / 3 Deakin St  
Brendale Qld 4500  
Phone: (07) 3481 9000

[sales@controlequipment.com.au](mailto:sales@controlequipment.com.au)

#### WA:

Unit 5 / 30 Enterprise Crescent  
Malaga WA 6090  
Phone: 1800 174 536

[www.controlequipment.com.au](http://www.controlequipment.com.au)

#### Offices/Agents in:


Sydney  
Melbourne  
Adelaide

Hobart  
Auckland  
Wellington



It's a simple to use meter that measures the levels of vibration transmitted to the hand from power tools, vehicles, machine controls and other vibration sources.

## Casella Vibdata Hand Arm Vibration Software

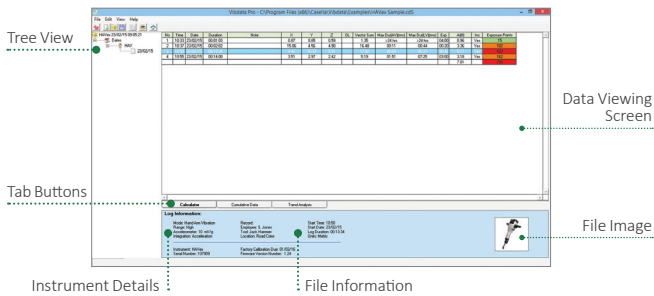

The HAVex meter is supplied with the Vibdata Lite software which allows you to download your measurements via USB for analysis and storage of data as required by the regulations. It is also possible to upgrade to Vibdata Pro which has the following added features:

- Exposure Calculator
- Merge/Combine Results
- Add Images
- Trend Analysis
- Add new records

Performance:	Conforms to ISO 8041 : 2005 Human Response to Vibration – Measuring Instrumentation
Level Ranges:	Low: 0.05-200m/s <sup>2</sup> , 0.005-20.4g High: 0.5-2000m/s <sup>2</sup> , 0.05-204g
Parameters:	Acceleration: Arms, Aeq, Amax, Peak, Vector Sum, Exposure Points
Frequency Weighting:	W <sub>H</sub> - Hand Arm Filter
Memory:	Flash memory storing up to 992 recordings
Display:	Full colour, graphic OLED 160 x 128
Batteries:	NiMH re-chargeable (typically 10 hours continuous use)
Connections:	AC Output: 4 pole 3.5mm jack Download: USB Micro B (cable incl.) Recharge: DC socket (charger & cable supplied)
Environmental:	Temperature: -10°C to +50°C Humidity: up to 90% RH non-condensing



## Ordering Information

<b>M104006</b>	Casella HAVex kit: Comprising of: HAVex meter, HARM Tri-axial Accelerometer & Cable, Mounting Plate, Carry Case, Vibdata Lite software
----------------	---

## Accessories

<b>M104009*</b>	HARM Tri-axial Accelerometer & Cable
<b>M104014**</b>	Vibdata Pro Vibration Analysis Software
<b>M104016*</b>	Mounting Block
<b>M104018*</b>	Charger Unit
<b>M104020*</b>	USB Cable

\* Supplied with the Casella HAVex as part of the kit

\*\* Upgrade from the supplied Vibdata LITE software supplied with the instrument



OIL & GAS



CONFINED SPACE



HYGIENE



MINING



LABORATORIES



HVAC



DEFENCE



SHIPPING



FUMIGATION

## Control Equipment Pty Ltd ABN 23 009 838 582

**QLD:**  
Unit 1 / 3 Deakin St  
Brendale Qld 4500  
Phone: (07) 3481 9000  
[sales@controlequipment.com.au](mailto:sales@controlequipment.com.au)

**WA:**  
Unit 5 / 30 Enterprise Crescent  
Malaga WA 6090  
Phone: 1800 174 536  
[www.controlequipment.com.au](http://www.controlequipment.com.au)

**Offices/Agents in:**  
Sydney  
Melbourne  
Adelaide  
Hobart  
Auckland  
Wellington

